BRUHAT BANGALORE MAHANAGARA PALIKE

Asst.Executive Engineer, Shettyhalli Sub Division,

Name of Work Improvements of RCC Drains 18th Cross Near pipe line Road BHEL mini Colony Mallasandra in Ward No.13 in Shettyhalli Sub Division.

Est Cost:10.00 Lakhs

Bruhath Bangalore Mahanagara Palike Dasarahalli Zone

Name of Work: Improvements of RCC Drains 18th Cross Near pipe line Road BHEL mini Colony Mallasandra in Ward No.13 in Shettyhalli Sub Division.

Est .Cost Rs.10.00 Lakhs

Sl No	Description of Items	Unit	No	L	B	D	Qty	Rate	Amount
1	KSRRB 300-3. Earthwork excavation by manual means in ordinary soil invoiving in average horizontal throw up to 2m & an average lift upto 1.5m , excavated surface leveled & sides neatly dressed , the disposed earth to be levelled neatly after breaking of clods complete as per specification MORTH/ Chapter 3. Page No. 142/ Item No. 19.1/ PWD SR 2016-17								
	18th cross	Cum	2	69.50	0.90	0.85	106.34		
							106.34	86.92	**9243.00**
	Basic Rate	82.00							
	Area Weightage @ 6%	4.92							
		86.92							
2	KSRB 4-1.3 : Providing and laying in position plain cement concrete of mix 1:4:8 with OPC cement @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. Specification No. KBS 4.3 Page No.12/ Item No. 4.3/ PWD SR 2016-17								
	18th cross	Cum	2	69.50	0.90	0.15	18.77		
							18.77	5159.02	**96809.00**
	Basic Rate	4867.00							
	Area Weightage @ 6%	292.02							
	Total	**5159.02**							
3	KSRB 4.2.2 : Providing and laying in position reinforced cement concrete of design mix M20 with OPC cement @ 320kgs, with with 20mm and down size graded granite metal, coarse aggregate @ 0.69 cum and fine aggregates @ .460cum, with super plasticisers @ 3 liters confirming to is 9103-1999 reafairmed -2008, machine mixed, concrete laid in layers not exceeding 15 cms thick, vibrated for all works in foundation for footings,pedastals,retaining walls, staircase, retaining walls, return walls, walls (any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, bed blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery, curing, complete as per specifications. Specification No. KBS 4.1, 4.5 ,P.13/I.4.11/ PWD SR 2016-17								
	18th cross	Cum	2	69.50	0.90	0.15	18.77		
	Side Wall		2 x 2	69.50	0.70	0.15	29.19		
	Covering		2	69.50	0.90	0.15	18.77		
							66.72	6371.66	**425117.00**
	Basic Rate	6011.00							
	Area Weightage @ 6%	360.66							
	Total	**6371.66**							

4	KSRB 4.9.2: Providing T.M.T steel reinforcement for R.C.C work including straightening, cutting, bending, hooking, placing in position, lapping and / or welding wherever required, tying with binding wire and anchoring to the adjoining members wherever necessary complete as per design (laps, hooks and wastage shall not be measured and paid) cost of materials, labour, HOM of machinery complete as per specifications.Specification No. KBS 4.6.3, TMT bars Fe 500. Page No. 17/ Item No. 4.46.2/ PWD SR 2016-17								
		Tonn		66.72	x	70kgs	4670.40		
							4.67		
							say		
							4.67	59413.00	**277482.00**
	Basic Rate	56050.00							
	Area Weightage @ 6%	3,363.00							
	Total	**59413.00**							
5	KSRB 4-6.9: Providing and removing centering, shuttering, strutting, propping etc., and removal of form work for vertical surface such as walss at any thickness,including attached pilasters,buttresses, plinth and string courses cost of all materials, labour complete as per specification. Specification No. KSRB 4.6.9. exceeding 1m in depth. Page No. 15/ Item No. 4.31/ PWD SR 2016-17								
	Side Wall		2x4	69.50		0.90	500.40		
			1x2	69.50		0.60	83.40		
							583.80	310.58	**181317.00**
	Basic Rate	293.00							
	Area Weightage @ 6%	17.58							
		310.58							
6	Disposal of debris to the final place of disposal with all lead and lift and as direction by the engineer in charge of the work, lead 10 Km a) Basic rate for haulage of materials as per item No. 17.4/KSRRB : M100-4.1 ..... Rs. 2.00 Tonne/Km b) Average earth of work 1.28 Tonne/Km for Rs. 2.00/Km c) Add loading and unloading Item No. 17.1 KSRRB M 100-1 Rs. 68.00 (P.134, I.no.17.1/1, PWD SR 2016-17)								
	Qty Vide Item No=1	Cum					**106.34**		
	Qty Limited to						**106.34**	77.60	**8252.00**
	(For 3 km = 3 x 1.28 x 2.5)	9.60							
	Loading and Unloading Charges	68.00							
		77.60							
7	Miscellaneous and unforseen Charges								**1780.00**
								Total	**1000000.00**

(Rupees Ten Lakhs Only)

CERTIFICATE

1 The Work spot has been inspected and the work found to be necessary

2 The Estimate is prepared as per the PWD SR 2016-17

3 The Provision made in estimate are adequate and essential

4 This area comes under BBMP limits.

Asst Engineer
Ward No-13
BBMP

Asst Executive Engineer
Shettyhalli Sub-Division
BBMP

Executive Engineer
Dasarahalli Zone
BBMP

ನಂ. ಇಇ/DD/ಕಾಸ/42/16-17 ದಿನಾಂಕ : 30.12.16

ರೂ. Ten lakhs only

ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ನಂ. ಇಇ/DD/TS/59/16-17 ದಿನಾಂಕ : 30.12.16

ರೂ. Ten lakhs only.

ಗಳ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

Name of Work:-

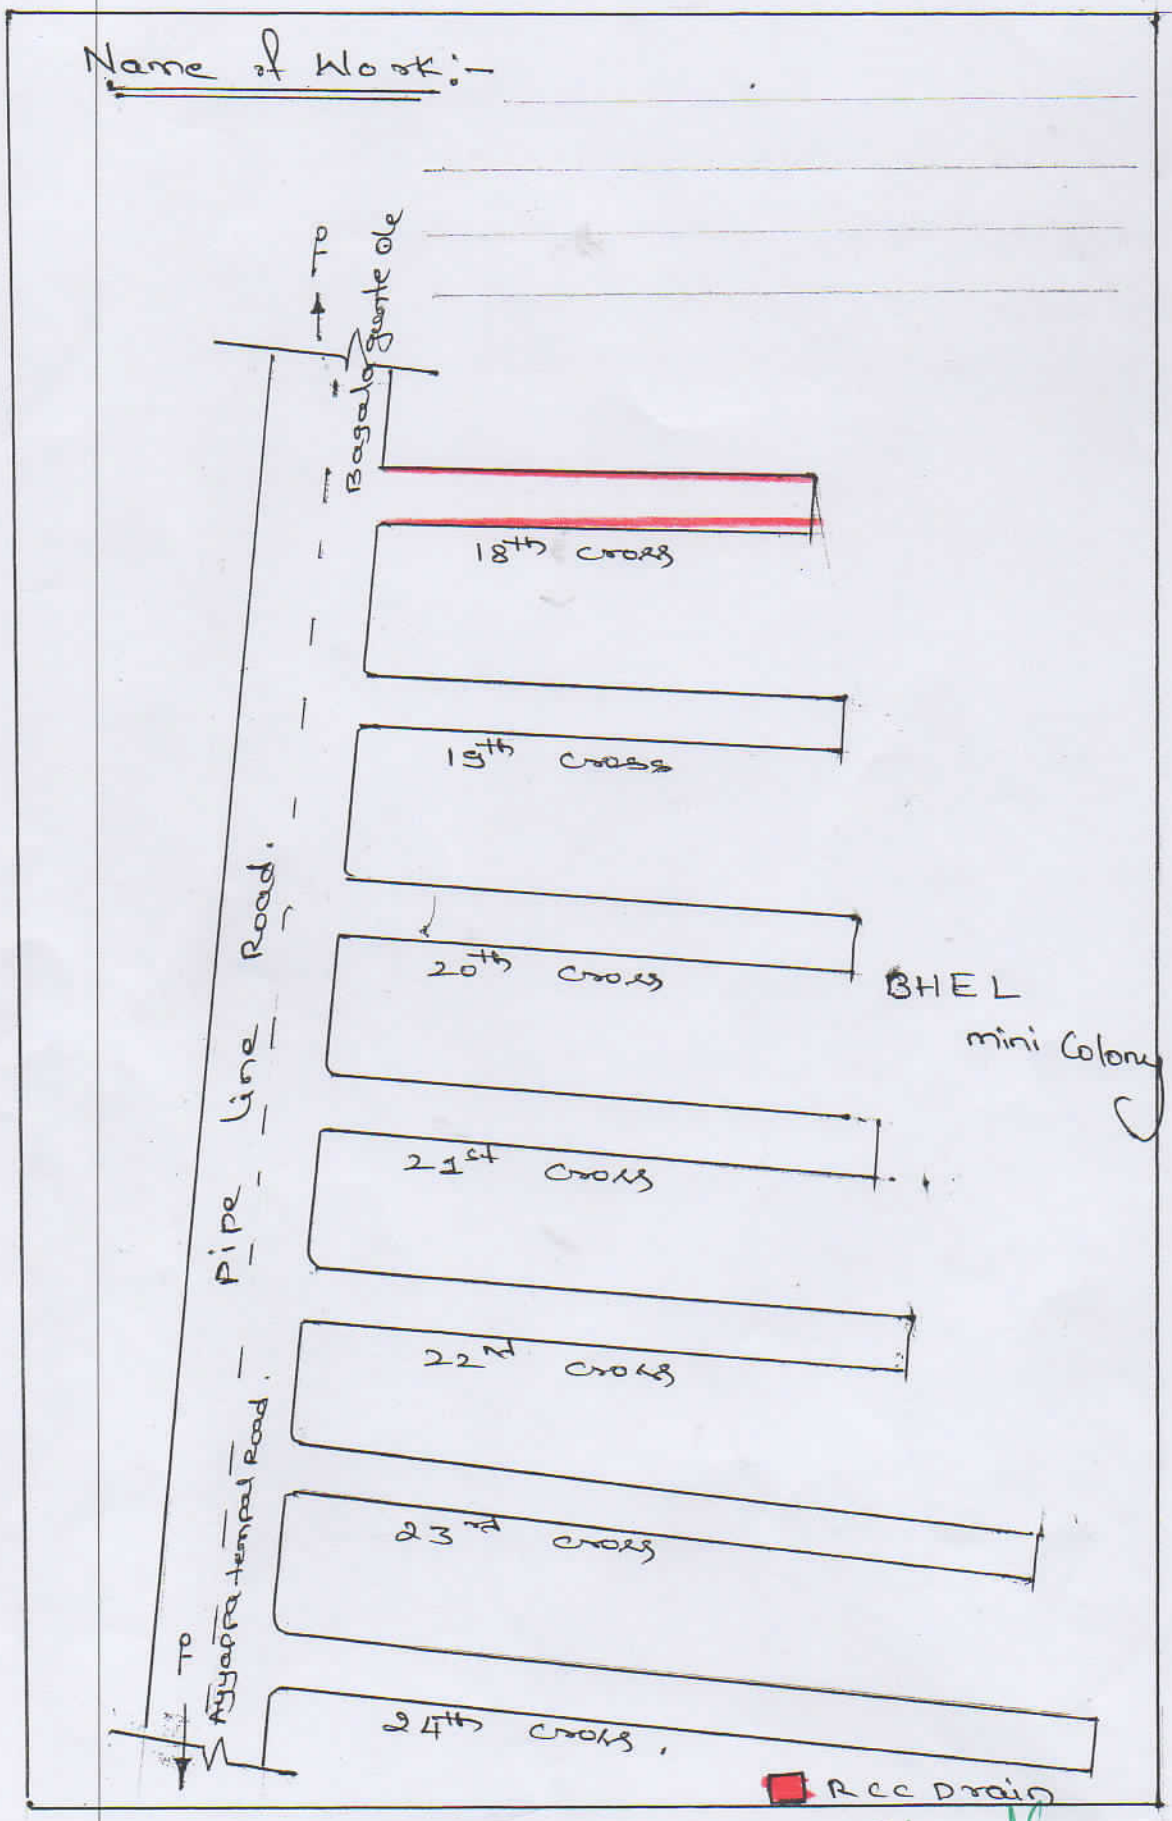

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಶೆಟ್ಟಿಹಳ್ಳಿ ಉಪವಿಭಾಗ, ದಾಸರಹಳ್ಳಿ ವಲಯ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ